

Installation feed-through terminal FRKI 2.5-4

Installation PE terminal FSLI 2.5-4

Neutral disconnect terminal FNT 2.5-4

The new pressure-spring single-level installation terminals are initially available in three (and later in nine) different versions. These are divided into three functional groups: feed-through, protective earth, and neutral disconnect terminals. The cross-sections of the first three terminals in this product line range from 0.5 mm² to 4 mm². The width is only 5 mm and the rated current is 32 amperes. The number of versions has been reduced from six to three terminals (later from 15 to nine terminals); this allows you to reduce your installation costs by lowering your stock requirements.


The **FNT** neutral disconnect terminals feature an integrated receptacle for the 10x3-mm neutral busbar. There is no need for an additional fixing plate because the neutral busbar snaps in the **FNT** terminals. The result is further optimized storage and costs, combined with the added advantage that you save 1.5 mm for each fixing plate no longer needed when mounting side-by-side on the DIN rail. The NT rail is quickly and securely connected with the terminal via a self-connecting, screw-less NT slider inside the terminal.

With the **FSLI** protective earth terminals, the PE potential is connected via the PE foot (which contacts the DIN rail on both sides). This **CONTA-CLIP** design does use more material but it offers an advantage in terms of additional safety and security for the PE conductor's contact. This solid, contiguous construction guarantees low contact resistance as well as the high security of the internal-spring PE contact foot.








Solid wires and flexible wires with wire-end ferrules can be inserted into the connection mechanism without the need for tools. The pressure spring opens automatically when the wire is inserted; this ensures a secure contact with the busbar. A standard screwdriver can be used to open the clamp for release and for the insertion of stranded wire without ferrules. The **FIQI 2.5-4** cross-connections are pluggable and insulated. They are available from 2 to 10 poles and can be used to safely distribute current on the **FRKI** feed-through terminals.

Can be combined with the FDLIS three-level installation terminal

The one-level terminals – **FRKI**, **FSLI** und **FNT** – can be used in combination with the three-level **FDLIS** installation terminals because the mechanical position of the neutral busbar is identical in both versions. So you can design and install customized modular-type circuits with both larger capacity/cross-sections (up to 76A/16 mm²) and smaller capacity/cross-sections. The terminals in the 2.5 to 4 mm² cross-section range are available now; the 6–10 mm² cross-section range (summer 2011) and the 16 mm² terminals will be available by the end of this year.

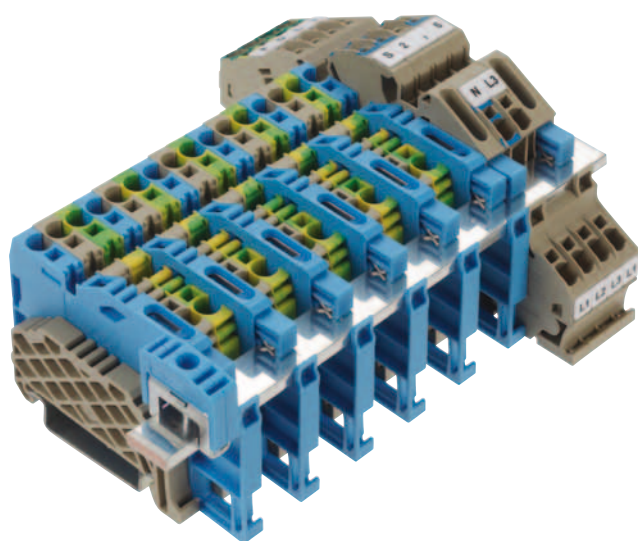

Sample FRKI

Pressure-spring connection system	FRKI 2,5-4	FSLI 2,5-4	FNT 2,5-4
 <ul style="list-style-type: none"> • Foot can be snapped on TS35 DIN rail • Housing made from polyamide 6.6 V0 			
Connection diagram			
	Installation feed-through terminal, 2 connections	Installation PE terminal, 2 connections	Neutral disconnect terminal, 1 connection
Connection type	Pressure-spring connection	Pressure-spring connection	Pressure-spring connection
Dimensions (L x W x H) with TS 35 x 7.5 mm	52,5 x 5,1 x 37,5 52,5 x 5,1 x 38,5	52,5 x 5,1 x 37,5 52,5 x 5,1 x 38,5	64 x 5,1 x 41,5 64 x 5,1 x 42,5
Type	Qty.p.pck.	Qty.p.pck.	Qty.p.pck.
Type Colour	FRKI 2,5-4 BG	FSLI 2,5-4 GNYE	FNT 2,5-4 BU
Cat. no.	3276.2 100	3279.2 100	3273.5 100
Type Colour	FRKI 2,5-4 BU		
Cat. no.	3276.5 100		
Type Colour	FRKI 2,5-4 OG		
Cat. no.	3276.3 100		
Type Colour			
Cat. no.			
Colours available	② ⑤ ③	②	⑤
Ratings	IEC* CSAus* CSA*	IEC* CSAus* CSA*	IEC* CSAus* CSA*
Rated voltage, V	800 600 600		250
Rated current, A	32 30 30		32
Rated wire cross-section, mm ² AWG	4 20-10	4 20-10	4 20-10
Rated impulse voltage, kV Contamination degree	8 3	8 3	8 3
Plug gauge acc. to EN 60 947-1 Flamm. class acc. to UL 94	A4 V0	A4 V0	A4 V0
Connection data			
Single wire (solid) stranded, mm ²	0,5-6 -	0,5-6 -	0,5-6 -
Finely-stranded finely-stranded (w/ferrules acc. to DIN 46 228/1) mm ²	0,5-6 0,5-4	0,5-6 0,5-4	0,5-6 0,5-4
Contact wire range mm ²	0,5-6	0,5-6	0,5-6
Insulation stripping length, mm	12	12	12
Features			
Material of insulated housing Temperature range	PA 6.6 - 40 bis +120°C	PA 6.6 - 40 bis +120°C	PA 6.6 - 40 bis +120°C
Number of cross-connection channels Test pick-off	2 -	1 -	1 -
Accessories	Qty.p.pck.	Qty.p.pck.	Qty.p.pck.
End plate FAP	FAP1 2,5-4/2A BG	FAP1 2,5-4/2A GN	FAP1 2,5-4/2A BU
Best.-Nr.	3484.2 20	3484.1 20	3484.5 20
Insulated cross-connector FQI	FIQI 2,5-4/2 YE		FIQI 2,5-4/2 YE
Best.-Nr.	17402.8 20		17402.8 20
Insulated cross-connector FQI	FIQI 2,5-4/3 YE		FIQI 2,5-4/3 YE
Best.-Nr.	17403.8 20		17403.8 20
Insulated cross-connector FQI	FIQI 2,5-4/4 YE		FIQI 2,5-4/4 YE
Best.-Nr.	17404.8 20		17404.8 20
Insulated cross-connector FQI	FIQI 2,5-4/5 YE		FIQI 2,5-4/5 YE
Best.-Nr.	17405.8 20		17405.8 20
Insulated cross-connector FQI	FIQI 2,5-4/6 YE		FIQI 2,5-4/6 YE
Best.-Nr.	17406.8 20		17406.8 20
Insulated cross-connector FQI	FIQI 2,5-4/7 YE		FIQI 2,5-4/7 YE
Best.-Nr.	17407.8 20		17407.8 20
Insulated cross-connector FQI	FIQI 2,5-4/8 YE		FIQI 2,5-4/8 YE
Best.-Nr.	17408.8 10		17408.8 10
Insulated cross-connector FQI	FIQI 2,5-4/9 YE		FIQI 2,5-4/9 YE
Best.-Nr.	17409.8 10		17409.8 10
Insulated cross-connector FQI	FIQI 2,5-4/10 YE		FIQI 2,5-4/10 YE
Best.-Nr.	17400.8 10		17400.8 10
Four-way cover FAD	FAD 2,5/4/ B YE	FAD 2,5/4/ B YE	FAD 2,5/4/ B YE
Best.-Nr.	3426.8 20	3426.8 20	3426.8 20
End stop ZES	ZES 35/2 BG	ZES 35/2 BG	ZES 35/2 BG
Best.-Nr.	3811.2 50	3811.2 50	3811.2 50
Screwdriver	SDB 0,4 x 2,0	SDB 0,4 x 2,0	SDB 0,4 x 2,0
Best.-Nr.	3164.0 1	3164.0 1	3164.0 1
Quick marking PMC SB	PMC SB 5/50 WH	PMC SB 5/50 WH	PMC SB 5/50 WH
Best.-Nr.	4600.7 500	4600.7 500	4600.7 500

* Approval is pending

FRKI 6-10 installation feed-through terminal

FSLI 6-10 installation PE terminal

FNT 6-10 neutral disconnect terminal

The new pressure-spring single-level installation terminals are now available in six (and later in nine) different versions. These are divided into three functional groups: feed-through, protective earth, and neutral disconnect terminals. The cross-sectional area of this product family now corresponds to 0.5 mm² to 10 mm², in widths of 5 mm and 8 mm and a nominal current of 32 or 57 amps. The number of versions has been reduced from twelve to six terminals (later from 15 to nine terminals) this allows you to reduce your installation costs by lowering your stock requirements.


The **FNT** neutral disconnect terminals feature an integrated receptacle for the 10x3-mm neutral busbar. There is no need for an additional fixing plate because the **FNT** terminals snap securely into place on the neutral busbar. The result is further optimized storage and costs, combined with the added advantage that you save 1.5 mm for each fixing plate no longer needed when mounting side-by-side on the DIN rail. The NT rail is quickly and securely connected with the terminal via a self-connecting, screw-less NT slider inside the terminal.

With the **FSLI** protective earth terminals, the PE potential is connected via the PE foot (which contacts the DIN rail on both sides). This **CONTA-CLIP** design does use more material but it offers an advantage in terms of additional safety and security for the PE conductor's contact. This solid, contiguous construction guarantees low contact resistance as well as the high security of the internal-spring PE contact foot.


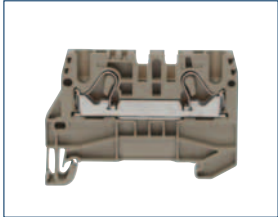
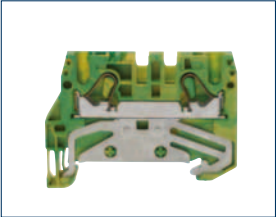

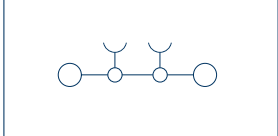
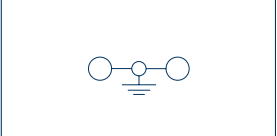

Solid wires and flexible wires with wire-end ferrules can be inserted into the connection mechanism without the need for tools. The pressure spring opens automatically when the wire is inserted; this ensures a secure contact with the busbar. A standard screwdriver can be used to open the clamp for release and for insertion of stranded wire without ferrules. The **FIQI 6-10** cross-connections are pluggable and insulated (from 2 to 10 poles). They can be used to safely distribute current on the **FRKI** feed-through terminals.

Combinations with the FDLIS three-level installation terminal

The one-level terminals, **FRKI**, **FSLI**, and **FNT** – can be used in combination with the three-level **FDLIS** installation terminals because the mechanical position of the neutral busbar is identical in both versions. So you can design and install customized modular-type circuits with both larger capacity/cross-sections (up to 76A/16 mm²) and smaller capacity/cross-sections. The terminals in the 2.5 to 4 mm² and 6 to 10 mm² cross-section ranges are available now; the 16 mm² cross-section range will be available by the end of 2012.

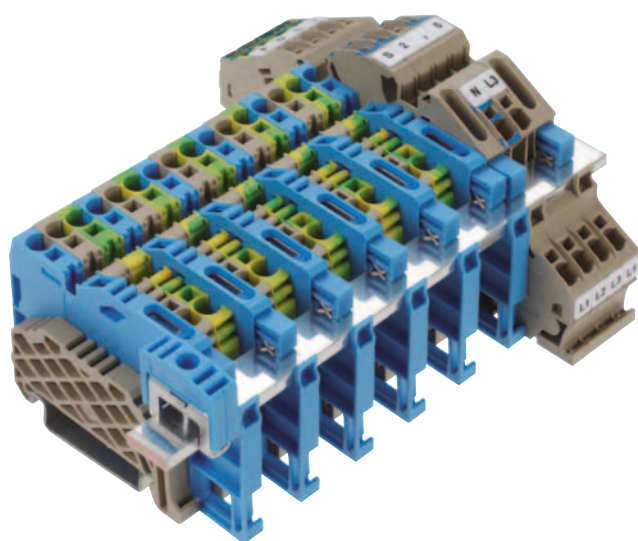

Sample FRKI

Pressure-spring connection system	FRKI 6-10	FSLI 6-10	FNT 6-10
 <ul style="list-style-type: none"> • Foot can be snapped on TS35 DIN rail • Housing made from polyamide 6.6 VO 			
Connection diagram			
	Installation feed-through terminal, 2 connections	Installation PE terminal, 2 connections	Neutral disconnect terminal 1 connection
Connection type	Pressure-spring connection	Pressure-spring connection	Pressure-spring connection
Dimensions (L x W x H) with TS 35 x 7.5 mm	56.5 x 8.1 x 39.8 56.5 x 8.1 x 40.5	56.5 x 8.1 x 39.8 56.5 x 8.1 x 40.5	67.5 x 8.1 x 39.8 67.5 x 8.1 x 40.5
Type			
Type Colour	FRKI 6-10 BG	FSLI 6-10 GN ^{YE}	FNT 6-10 BU
Cat. no.	3277.2	3280.2	3274.5
Type Colour	FRKI 6-10 BU		
Cat. no.	3277.5		
Type Colour	FRKI 6-10 OG		
Cat. no.	3277.3		
Type Colour			
Cat. no.			
Colours available	② ⑤ ③	②	⑤
Ratings	IEC* UL* CSA*	IEC* UL* CSA*	IEC* UL* CSA*
Rated voltage, V	800 600 600		250
Rated current, A	57 44 44		
Rated wire cross-section, mm ² AWG	10 22-10	10 22-10	10 22-10
Rated impulse voltage, kV Contamination degree	8 3	8 3	8 3
Plug gauge acc. to EN 60 947-1 Flamm. class acc. to UL 94	A5 V0	A5 V0	A5 V0
Connection data			
Single wire (solid) Stranded (flexible), mm ²	1,5-10 -	1,5-10 -	1,5-10 -
Stranded Stranded (w/ferrules acc. to DIN 46 228/1), mm ²	1,5-10 1,5-10	1,5-10 1,5-10	1,5-10 1,5-10
Contact wire range, mm ²	1,5-10	1,5-10	1,5-10
Stripping length, mm	12	12	12
Features			
Material of insulated housing Temperature range	PA 6.6 -40 to +120°C	PA 6.6 -40 to +120°C	PA 6.6 -40 to +120°C
Number of cross-connection channels Test pick-off	2 -	1 -	1 -
option Accessories			
FAP ^I end plate	FAP ^I 6-10/2A BG	FAP ^I 6-10/2A GN	FAP ^I 6-10/2A BU
Cat. no.	3485.2	3485.1	3485.5
FIQ ^I insulated cross-connector	FIQ ^I 6-10/2 YE		FIQ ^I 6-10/2 YE
Cat. no.	17412.8		17412.8
FIQ ^I insulated cross-connector	FIQ ^I 6-10/3 YE		FIQ ^I 6-10/3 YE
Cat. no.	17413.8		17413.8
FIQ ^I insulated cross-connector	FIQ ^I 6-10/4 YE		FIQ ^I 6-10/4 YE
Cat. no.	17414.8		17414.8
FIQ ^I insulated cross-connector	FIQ ^I 6-10/5 YE		FIQ ^I 6-10/5 YE
Cat. no.	17415.8		17415.8
FIQ ^I insulated cross-connector	FIQ ^I 6-10/6 YE		FIQ ^I 6-10/6 YE
Cat. no.	17416.8		17416.8
FIQ ^I insulated cross-connector	FIQ ^I 6-10/7 YE		FIQ ^I 6-10/7 YE
Cat. no.	17417.8		17417.8
FIQ ^I insulated cross-connector	FIQ ^I 6-10/8 YE		FIQ ^I 6-10/8 YE
Cat. no.	17418.8		17418.8
FIQ ^I insulated cross-connector	FIQ ^I 6-10/9 YE		FIQ ^I 6-10/9 YE
Cat. no.	17419.8		17419.8
FIQ ^I insulated cross-connector	FIQ ^I 6-10/10 YE		FIQ ^I 6-10/10 YE
Cat. no.	17410.8		17410.8
ZES end stop	ZES 35/2 BG	ZES 35/2 BG	ZES 35/2 BG
Cat. no.	3811.2	3811.2	3811.2
SDB screwdriver	SDB 0.6x3.5	SDB 0.6x3.5	SDB 0.6x3.5
Cat. no.	1086.0	1086.0	1086.0
PMC SB quick marking	PMC SB 8/40 WH	PMC SB 8/40 WH	PMC SB 8/40 WH
Cat. no.	9323.7	9323.7	9323.7

* Approval is pending